



Compact Industrial Router
4G LTE, Dual SIM and Dual Ethernet Ports

InRouter302 Series

Industrial LTE Router

The InRouter302 (IR302) is an IoT cellular router that integrates 4G LTE, Wi-Fi, and VPN technologies to provide an easy, reliable, and secure Internet connectivity. With technologies such as 4G wireless wide area network and Wi-Fi wireless local area network, it provides uninterrupted multiple network access capabilities, and with its comprehensive security and wireless services, it realizes up to 10 thousands equipments networking and provides high-speed data access for equipment networking.


This product is suitable for the networking of unattended devices and sites. It is embedded with watchdog and multi-layer link detection mechanisms to ensure reliable and stable communications. The router can be deployed easily to build large scale networks scaling up to tens of thousands of devices. Using our InHand Device Manager cloud platform, users can manage their network efficiently.

The IR302 can be used in a wide range of industrial and commercial IoT applications, providing an option of good balance between cost and performance.

Key industries:

- Smart Commerce
 - ATM, POS
 - Unattended kiosk
 - Digital signage
 - Retail stand
- Smart Energy
 - EV charging
 - Power distribution, Meter reading
- Smart City
 - Heat & Water supply
 - Gas supply security, Traffic management
- Smart Manufacturing
 - Medical device networking and other applications

Application Case

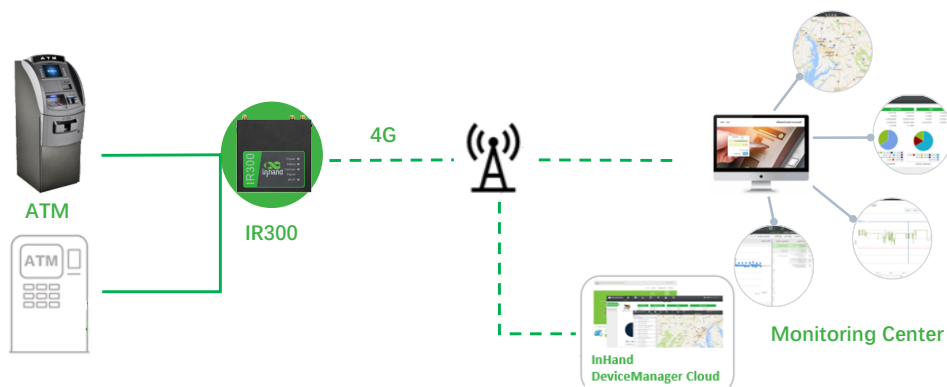

Product Specifications

InRouter302 Hardware Specifications			
Hardware Platform			
CPU Platform	580MHz	RAM	128MB DDR2
Flash	32MB SPI		
Interface			
Ethernet Port	IR302: 2*10/100Mbps fast Ethernet port, LAN/WAN port 1.5KV network isolation transformer protection		
Serial Port (*Optional)	1*RS232		
I/O (*Optional)	Supports 2*IO (DO or DI can be configured) DI: 0~30V, low: 0~3V, high: 10~30V, max input: 30V DO: Wet contact, low: 0V, high: 13V (pull up)		
* Alternatives for I/O or Serial port			
Power Supply	DC9-36V, over-current protection, anti-reverse connection, 2 PIN industrial terminal block		
Reset Button	Pinhole reset button		
SIM Card	Dual drawer-type SIM card slots. 2FF SIM		
Wi-Fi (Optional)	IEEE 802.11b/g/n, 150Mbps		
Antenna Connector	3G/4G: SMA x 1; Wi-Fi: RP-SMA x 1 Note: North America models (FQ38, FQ33): 2 x SMA 4G antenna connectors.		
Ground Terminal	Supports		
Mechanical Specs			
Dimensions	90 x 90 x 25mm	Weight	259g
Installation Method	Panel mounting, rail mounting	Protection Rating	IP30
Housing	Metal	Cooling	Fanless
Power Rate			
Working Power	100-120mA@12V	Standby Power	80-90mA@12V
Peak Power	190mA@12.0V		
Wi-Fi Transmit Power			
Transmit Power	802.11b:16dBm +/-2dBm(11Mbps) 802.11g:16dBm +/-2dBm(54Mbps) 802.11n@2.4GHz:16dBm +/-2dBm(HT20 MCS7) 802.11n@2.4GHz:16dBm +/-2dBm(HT40 MCS7)		
Ambient Environment			
Storage Temperature	-40 ~ 85°C	Operating Temperature	-20 ~ 70°C
Ambient Humidity	5 ~ 95% (non-condensing)		
Indicator			
LED	Power, Status, Cellular, Wi-Fi, cellular Signal		
EMC			
Static	EN61000-4-2, level 2	Radiation Electric Field	EN61000-4-3, level 2
Pulsed Electric Field	EN61000-4-4, level 2	Surge	EN61000-4-5, level 2
Conducted Disturbance Immunity	EN61000-4-6, level 2	Shock Wave Resistance	EN61000-4-12, level 2
Power Frequency Magnetic Field Resistance	EN61000-4-8, horizontal / vertical 400A/m (>level 2)		
Physical Specs			
Shockproof	IEC60068-2-27	Vibration Resistance	IEC60068-2-6
Free Fall	IEC60068-2-32		
Certificate			
CE, FCC, PTCRB, IC, Verizon, AT&T, E-mark, T-mobile (in progress)			

InRouter302 Software Specifications			
Network Connection			
Network Access	APN, VPDN, PrivateNetwork	Access Authentication	CHAP/PAP
LAN Protocol	ARP	WAN Protocol	PPP, PPPoE, DHCP
Network Type	GSM/GPRS/EDGE, UMTS/HSPA+/EVDO/TD-SCDMA, TDD LTE/FDD LTE (Please refer to the Ordering Guide for frequencies.)		
Network Protocol			
IP Application	Ping, RouteTrace, DHCP Server, DHCP Relay, DHCP Client, DNS relay, DDNS, Telnet		
IP Routing	Static routing		
NAT	Supports network address translation		
Security			
Network Security	Stateful Packet Inspection (SPI), DoS attack defense; Multicast filter/Ping probe packet, Access Control List (ACL); Content URL filter, port mapping, virtual IP mapping, IP-MAC binding		
Data Security	Supports PPTP, L2TP, GRE, IPSEC VPN (IKEv1, IKEv2), OPENVPN protocols Supports CA digital certificate		
Reliability			
Hot Backup	VRRP hot backup		
Link Detection	Sends heartbeat packets to detect, auto redials when disconnected		
Dual SIM Failover	Supports dual SIM failover		
Embedded Watchdog	Device runs self-detection, auto recovers from malfunctions		
WLAN (Optional)			
Protocol	IEEE 802.11b/g/n	Rate	Up to 150Mbps
Mode	AP, Client and WDS modes		
Security	Open system, shared key, WPA/WPA2 certification WEP/TKIP/AES encryption		
Transmission Distance	80 meters by line of sight (Actual transmission distance depends on environment of the site.)		
Network Management			
QoS Management	Bandwidth limit, IP speed limit		
Configuration	Telnet, web, ssh and console		
Upgrade	Web, DeviceManager		
Log	Local system log, remote log, and serial export of log. Power down saving of important logs.		
SMS Functions	Status query, configuration, restart		
Dial-on-demand	Dial-on-demand, data / SMS activation		
Network Management	Supports InHand DeviceManager, batch management Add the user experience plan to access The InHand Networks cloud platform to enjoy efficient and convenient services.		
SNMP	SNMP v1/v2c/v3, supports SNMP TRAP		
Traffic Management	Supports data traffic threshold, traffic statistics and traffic alarm		
Alarm	System restart alarm, LAN port online/offline alarm, data traffic alarm, SIM card failure alarm, etc.		
Maintenance Tools	Ping, route tracking, network speed test		
Status Query	System status, modem status, network connection status, and routing status		

Ordering Guide

Model	Region (Operator)	Network Type	Model code: IR302-<WMNN>-<WLAN/NA>-<IO/S/NA> <WMNN>: Cellular Type & Module	<WLAN/NA>: Wi-Fi	<IO/S/NA>
IR302-LQ28-<WLAN/NA>-<IO/S/NA>	China	LTE CAT4	FDD: B1/B3/B5/B8 TDD: B34/B38/B39/B40/B41 WCDMA: B1/B8 TD-SCDMA: B34/B39 EVDO/CDMA: BC0 GSM: B3/B8	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ58-<WLAN/NA>-<IO/S/NA>	Europe & APAC	LTE CAT4	FDD: B1/B3/B7/B8/B20/B28A WCDMA: B1/B8 GSM: B3/B8	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ38-<WLAN/NA>-<IO/S/NA>	North America AT&T, Verizon	LTE CAT4	FDD: B2/B4/B5/B12/B13/B14/B66/B71 WCDMA: B2/B4/B5	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ78-<WLAN/NA>-<IO/S/NA>	Australia, Latin America	LTE CAT4	FDD: B1/B2/B3/B4/B5/B7/B8/B28 TDD: B40 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ33-<WLAN/NA>-<IO/S/NA>	North America, AT&T, Verizon	LTE CAT1	FDD: B2/B4/ B5/B12/B13/B25/B26 WCDMA: B2/B4/B5	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ53-<WLAN/NA>-<IO/S/NA>	EMEA	LTE CAT1	FDD: B1/B3/B7/B8/B20/B28 WCDMA: B1/B8 GSM/EDGE: B3/B8	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-LQ00-<WLAN/NA>-<IO/S/NA>	China	LTE CAT1	FDD: B1/B3/B5/B8 TDD: B34/B38/B39/B40/B41 GSM: 900/1800MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 <NA>: no interface
IR302-FQ02-<WLAN/NA>-<IO/S/NA>	Global	LTE CATM/NB	CAT M: B1/B2/B3/B4/B5/B8/B12/B13/B14/B18/B19/B20/B25/B26/B27/ B28/B66/B85 CAT NB: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66/ B71/B85 GSM/EDGE: 850/900/1800/1900 MHz	WLAN: Wi-Fi <NA>: no Wi-Fi	IO: 2*IO S: 1*RS232 NA: no interface
IR302-EN00-<WLAN>-<IO/S/NA>			No cellular module	WLAN: Wi-Fi <NA>: no Wi-Fi	

Example:

IR302-FQ38-WLAN: CAT 4, AT&T, VzW, Dual Ethernet port IR300 series cellular router, support IPSec / PPTP / L2TP / OPEN VPN, supports FDD, and WCDMA networks, supports Wi-Fi AP & Client mode

Note: Users are asked to join InHand User Experience Plan at fist time login. If user agreed to join, the router will connect to InHand DeviceManager portal. If users want to disable it, please go to Services->User Experience Plan to change the setting.

About Us

InHand Networks is a global leader of Industrial IoT, with a record of tremendous success following groundbreaking innovation since our inception in 2001.

InHand serves world-class partners and customers with industrial M2M routers, gateways, industrial Ethernet switches, rugged computers and IoT management platforms. We provide IoT solutions for various vertical markets including Smart Grid, Industrial Automation, Remote Machine Monitoring, Smart Vending, Smart City, Retail and more.

Proudly bearing the marks of both Rockwell Automation Technology Partner in Asia-Pacific and Schneider Electric Technology Partner, InHand Networks defines industrial innovation and reliability.



43671 Trade Center Place, Suite 100, Dulles, VA 20166 USA
T: +1 (703) 348-2988
E: info@inhandnetworks.com
www.inhandnetworks.com